

CUBREBOCA CON FILTRO

CUBREBOCA 3 CAPAS CON FILTRO ANTIBACTERIAL BFE 95%

CBE352017-BFE95

- Specification:
- Cubreboca con 3 capas:
 - Polipropileno 35 gramos
 - Filtro meltblown antibacterial 20 gramos BFE 95%
 - Polipropileno 17 gramos
 - Hilo elástico de Itex/poliéster elastic de 60 cms.
 - Usuario hace un nudo y se coloca la liga detrás de la cabeza según imagen.

Marca: EliteWear Disposables

- Especificación filtro:
- Hecho en U.S.A.
 - Material: Meltblown de 20 gramos m2.
 - Coeficiente de Filtración de Bacterias BFE 95%

Dimensiones: Base: 16.5 cms x 12.5 cms
Elastico: 60 cms

Manufactura: Doble sellado por ultrasonido en dobleces.
Sin costuras. Material sin aditivos. Hidrofóbico.

- Contenido :
- 15 paquetes de 100 cubrebocas ensamblados
 - Caja con 1500 piezas total

Aplicaciones: Uso general.

Color: White


Empaque: Caja de cartón medidas:
30 cm width
40 cms length
30 cms height

Peso: 3.5 kgs


Origen: Hecho en Mexico



INSTRUCCIONES:

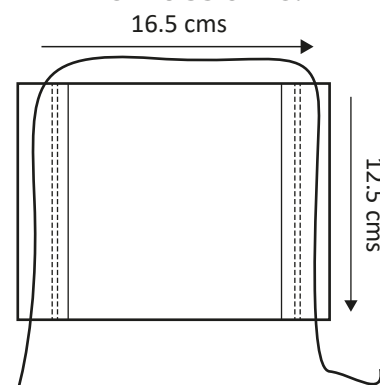

1. USUARIO HACE UN NUDO EN LAS PUNTAS DEL ELASTICO

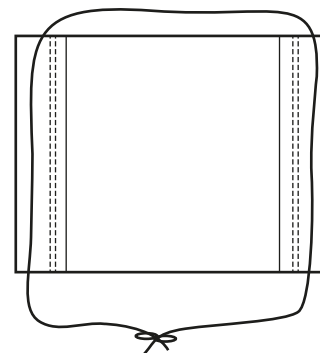

2. COLOCAR CUBREBOCA EN NARIZ Y BOCA Y ELASTICOS ATRAS DE LA CABEZA.

CONTINGENCY FACEMASK KIT

Charged Meltblown PP for Surgical/Dental Mask Applications PD-6681 Made in U.S.A.

General Description: A charged meltblown polypropylene using polymers approved for Medical Class II environments and end uses.
See ASTM F23-40 guidelines

Chemistry: We only use validated polypropylene resin.
See Validation Document 2016-2 for details

Applications: Medical, surgical and dental disposable face masks where superior protection, wearer comfort and breathability are key.

MNW Grade	Basis Weight gms/sm	ASTM F2101-14		TSI 8130 0.3 micron NaCl Challenge 32 lpm at 100 cm ²		Air Perm ASTM D737 cfm/ft ²
		BFE %	Differential Pressure mm H ₂ O/cm ²	Penetration %	Resistance mm H ₂ O	
PD-6697	10	N/A	N/A	52.0	0.6	243
PD-6681	20	95+	<4.0	24.0	2.0	67
PD-6913	27	98+	<5.0	12.7	2.5	56
PD-6737	34	98+	<5.0	10.3	2.8	52

Disclaimer: This technical data sheet is the intellectual property of Velavi SA. It is agreed this information is supplied for the use of the receiving party only and remains the property of Velavi SA.

The data presented and facts stated are representative of in-house and/or third party testing and are to be used as typical data and not necessarily a specification.